



Elevating your **Standard** of Living

Sysco Elevators & Escalators has a decade combined experience in the lift installation, repair, modernisation and maintenance industry and we cover every kind of lift service imaginable.

Indeed, our experience has proved invaluable in attracting a lift engineering team that is exceptionally qualified, experienced, focused on standards and open to ongoing training in ever changing technologies, approaches and systems.

01






Welcome to Sysco

Sysco Elevators & Escalators is a modernized and professional elevator company which integrates the design, development, sales, installation, and maintenance into a whole. **Sysco Elevators & Escalators** has the A-level qualification certificate, issued by General Administration of Quality Supervision, Inspection and Quarantine, for elevator installation, modernization and maintenance.

Sysco Elevators & Escalators an elevator expert who deems it his own responsibility to prosper the national brand, will continuously innovate and develop to become a integrated internationally competitive brand operator. Each elevator produced by **Sysco Elevators & Escalators** is individually engineered.

Sysco Elevators & Escalators provides complete elevator packages for machine room and machine room-less applications. These open architecture solutions provide customers with the most innovative, highest performing and most cost effective products in the industry.

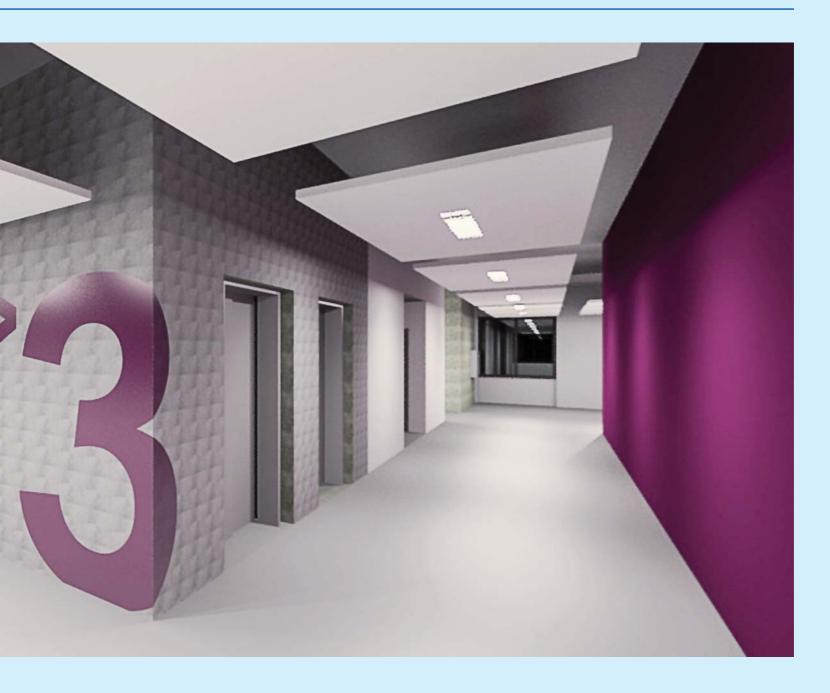

PASSENGERS LIFTS





APPLICATIONS & SPECIFICATIONS

Suitable for Villas, Banglows, Old Building, Low rise Residential Apartments. Advantages No machine room Min. pit 150-300mm Min. head room 2900mm MS structure. Power Single phase, 3 phase Capacity 3-5 persons (250-350 kg) 0.30, 0.50, 0.63 m/s Speed Travel up to 6 stops SS matt finish, MS painted designer Car shades shades, Glass cabin Doors options Automatic SS Framed glass door, SS doors Designer doors and Manual MS Swing door, Telescopic Manual Door **Operating System** Hydraulic and Gearless Traction Interior Can be customized according to client taste

OVERVIEW

Sysco Elevators sets new standards for elevator performance, reliability and design flexibility. It should be fast, safe and reliable, simple enough to operate even for older residents or passengers. Sysco Elevators deliver all this, with comfort and style. All our passenger lifts are not only equipped with latest technology but also comply with all the safety regulations. We make customized passenger elevators which suites specific needs.

There are two type of Passenger elevators:

Automatic Elevators

Manual Elevators

DOOR OPTIONS





















APPLICATIONS & SPECIFICATIONS

Suitable for Villas, Bungalows, Old Buildings, Low rise Indoor & Outdoor Suitable to install beside Staircase No machine room, No Lift well pit 150mm, Advantages Head room 2700mm Wall Size Inside 985 x 985mm / Outside 1150 x 1150mm Power Single phase, 2 kw Capacity 3 persons (250 kg) : 0.20 m/s Speed Travel 4 stops (G+3) Car shades SS matt finish with glass Doors options Manual SS Framed & Glass Swing door Hydraulic Operating System Interior Can be customized according to client

taste

OVERVIEW

Sysco Home Lifts offer you a simple and easy way of moving safely between the floors of your home with our unique residential elevator. Considered a practical and attractive alternative to stairs. Sysco Home Lifts keeps you living independently in the home you love without the need to move house. Whether you live in a town home, modern colonial or waterfront condo, our residential elevators can be installed in any two-story home in the INDIA.

Types: Automatic & Manual

DOOR OPTIONS















HOSPITAL LIFTS





APPLICATIONS & SPECIFICATIONS

Suitable for Hospital, Low rise Residential Apartments Advantages Direct Landing System, Automatic rescue device Power 3 phase : 15, 20, 26 Persons (1020 - 1788 kg) Capacity 0.5, 1.0 m/s Speed : Trave Upto 11 stops Car shades MS matt finish, Hand rail, LED Lighting Car Door SS Automatic Telescopic Door : **Landing Door** SS Automatic Telescopic Door Geared & Gearless Traction Operating System Interior Can be customized according to client taste

OVERVIEW

Sysco Stretcher Lifts are used for simple transportation of a patient on wheelchair to wheeling away a critical patient on stretcher without disturbing his life support system with doctors and nurses, smoothly, silently and swiftly, without jerks and shocks. Elevators for medical purpose are vertical transport equipment used in hospital and other relevant places to move patients and surgical instruments. Beacon offers Hospital elevator.

Types: Auto Door and Manual door operation.

DOOR OPTIONS



















MENTO LIFTS



OVERVIEW

Sysco Mento Lifts brings you a revolutionary concept in the field of elevators to give you absolute freedom in designing - MRL - Machine Room Less Elevators! Our exclusive Machine room less elevators brings aesthetic enhancements for you structure.

Features

- Smoothest Travel
- Absolute Freedom in Building Designs
- Substantial Saving on Electricity Cost
- Save the Construction Cost
- More Safe

DOOR OPTIONS







APPLICATIONS & SPECIFICATIONS

ľ			
	Suitable for	:	Commercial building, Low rise Residential Apartments & Restaurants
	Advantages	:	No Machine Room, Direct Landing System, Automatic rescue device
	Power	:	3 phase
	Capacity	:	6 - 16 persons (408 - 1088 kg)
	Speed	:	1.0, 1.25, 1.50 m/s
	Travel	:	Upto 11 stops
	Car shades	:	SS matt finish, Full length Mirror, hand rail, LED Lighting
	Car Door	:	Automatic SS / MS Designer / Glass Door
	Landing Door	:	Automatic SS / MS Designer / Glass Door
	Operating System	:	Gearless Traction
	Interior	:	Can be customized according to client taste

HYDRAULIC LIFTS





APPLICATIONS & SPECIFICATIONS

Suitable for	:	Commercial Buildings, Low res Residential Apartments & Restaurants
Advantages	:	No Machine Room, Direct Landing System, Automatic Rescue Device
Power	:	3 phase
Capacity	:	6-16 persons (408 -1088 Kg)
Speed	:	1.0, 1.25, 1.50 m/s
Travel	:	Upto 11 stops
Car shades	:	SS matt finish, Full length mirror, Hand rail, LED Lighting
Car Door	:	Automatic SS / MS Designer / Glass Door
Landing Door	:	Automatic SS / MS Designer / Glass Door
Operating System	:	Geared & Gearless Traction
Interior	:	Can be customized according to client taste

OVERVIEW

Sysco Hydro Lifts give an additional eye catching look to a modern building and act as architectural highlights of the buildings. They act like the ornaments of a building for they enhance the beauty and bring life in it. We provide Hydro elevators for Hotels, Apartments, shopping malls etc.

Features

- Noiseless technology Improved comfort
- Reduced energy consumption
- Environmental sustainability / Easy Maintenance
- Reduced overhead and pit requirements

DOOR OPTIONS

















HYDRO POWER MODERNIZATION



GOODS LIFTS





APPLICATIONS & SPECIFICATIONS

Suitable for : Industrial, Commercial Buildings,
Hospitals, Low rise residential Apartments
& Restaurants

Advantages : Direct Landing System, Automatic rescue device

Power : 3 phase

Capacity : 500 - 5000 kg

Speed : 0.5, 1.0 m/s

Travel : Upto 11 stops

Car shades : MS Powder Coat / SS Matt finish

Car Door : MS / SS Automatic Telescopic Door /
Manual Collapsible Door

Landing Door : MS / SS Automatic Telescopic Door /

Manual Collapsible Door

Operating System : Geared Traction

Interior : Can be customized according to client

taste

OVERVIEW

Sysco Freight Lifts offer you a suitable solution for the installations where bulkable commodities/goods needed to transport vertically like work-shops, show-room, industries etc.. **Sysco** implementing new technologies in order to realize smooth riding comfort and greater cost performance in Freight Lifts.

Benefits and advantages of Goods Lifts:

- More efficient, safer elevator installation processes
- Reduced building construction time and costs
- No oil and low energy usage

DOOR OPTIONS























An escalator is a moving staircase for transporting people between floors of a building. It is generally agreed that an escalator is the most efficient means to move large numbers of people between floors.

Sysco escalators come in a diverse range of specifications:

- Inclination 27.3° | 30° | 35°
- Step width 600 mm | 800 mm | 1000
- Speed 0.5 m/s | 0.65 m/s | 0.75 m/s
- Level steps 2 | 3 | 4*
- Environment Indoor | semi–outdoor | fully outdoor

Sysco horizontal autowalks cover all the standard requirements:

- Inclination from 0° to 6°
- Pallet width 1000 mm | 1200 mm | 1400 mm
- Speed 0.5 m/s | 0.65 m/s | 0.75 m/s
- Environment Indoor | semi–outdoor | fully outdoor

Sysco inclined autowalks are available with three degrees of inclination:

- O Inclination 10° | 11° | 12°
- Pallet width 800 mm | 1000 mm | 1100 mm
- O Speed 0.5 m/s
- Environment Indoor | semi–outdoor

Commercial escalators and inclined autowalks

In **shopping centers**, **supermarkets** and **department stores**, escalators and inclined autowalks play a vital role in routing shoppers to the right location, such as particular shops in a mall or specific aisles in a store.

Small retail shops	Hypermarkets	Large shopping malls
35° escalator	12° inclined autowalk	30° escalator
800 mm step width	1000 mm pa ll et width	1000 mm step width
0.5 m/s	0.5 m/s	0.5 m/s
Stand-by speed or Stop & Go operation1	Continuous	Continuous
Glass balustrade	Glass balustrade	Glass balustrade
Primed sheet,	Primed sheet,	Customized or stainless
sheet side cladding	sheet side cladding	steel side cladding

Infrastructure escalators and horizontal autowalks

In public transportation environments such as **airports** and **transit centers**, the challenge is to get passengers and their luggage to their destination on time. To meet this challenge, escalators and horizontal and inclined autowalks are being increasingly used in these buildings.

Railway station	Metro station	Airport	Airport		
30° escalator	27.3°/30° escalator	30° escalator	0° horizontal autowalk		
1000 mm step width	1000 mm step width	1000 mm step width	1000 mm pallet width		
0.65 m/s	0.65 m/s	0.5 m/s	0.65 m/s		
Continuous, stand-by and Stop & Go operation ¹	Continuous, stand-by and Stop & Go operation ¹	Stop & Go operation	Stop & Go operation		
Glass or solid inclined balustrade	Glass or solid inclined balustrade	Glass balustrade	Glass balustrade		
Stainless steel side cladding	Stainless steel side cladding	Customized or stainless steel side cladding	No cladding		

DUMBWAITER LIFTS





OVERVIEW

The cabin and the doors of all the dumbwaiters are manufactured using Stainless Steel. The vertical bi-parting doors are well suited to optimize the space utilization. The Dumbwaiter travel so smoothly that each time it travels you can ensure no damage to your valuable crockery.

APPLICATIONS & SPECIFICATIONS

Suitable for	:	Restaurants, Hospitals & Kitchens
Advantages	:	Easy Serving
Power	:	Single Phase, 3 phase
Capacity	:	50 - 250 kg
Speed	:	0.20, 0.30 m/s
Travel	:	Upto 4 stops
Car shades	:	MS Powder Coat / SS Matt finish
Car Door	:	MS / SS Vertical bi Parting Door
Landing Door	:	MS / SS Vertical bi Parting Door
Operating System	:	Geared Traction
Interior	:	Can be customized according to client taste

AUTOMOBILE LIFTS



OVERVIEW

Sysco Car Lifts designed for moving cars in condominiums, car showrooms, garages, homes and more, our car elevators provide space saving, easy-to-use basement or rooftop parking solutions for high-density locations where horizontal land space is at a premium.

APPLICATIONS & SPECIFICATIONS

Suitable for	:	Commercial Buildings, Hospitals, Low rise Residential Apartments
Advantages	:	Direct Landing System, Automatic rescue device
Power	:	3 phase
Capacity	:	2000 - 2500 kg
Speed	:	0.30, 0.5 m/s
Travel	:	Upto 11 stops
Car shades	:	MS Powder Coat / SS Matt finish
Car Door	:	MS Automatic Door / Manual Collapsible Door
Landing Door	:	MS Automatic Door / Manual Collapsible Door
Operating System	:	Hydraulic, Geared & Gearless Traction
Interior	:	Can be customized according to client taste

OUR CABIN MODELS



Helping people in thousands of office and residential buildings get to work on time and in style













SE - Model - 004







TYPES OF DOORS

MANUAL DOORS







Manual Telescopic Door



Imperforated Door



Collapsible Doors

AUTOMATIC DOORS



M.S. Auto Door



M.S. Small Vision Panel



M.S. Big Vision Panel



S.S. Auto Door



S.S. Small Vision Panel



S.S. Big Vision Panel

STATE-OF-THE-ART TECHNOLOGY



CONTROL PANEL BOARDS





SYSTEM DRIVERS







Mitsubishi



Toshibha



Yaskawa

GEARED & GEARLESS TRACTION MACHINES


















INTERIOR DESIGNS


CEILING & LIGHTING



FLOORING

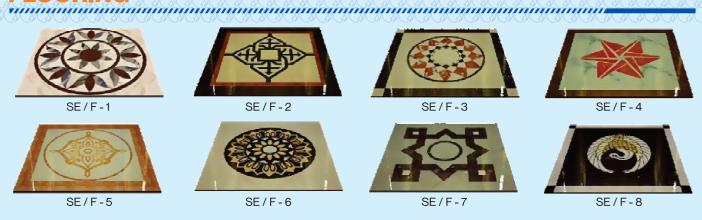

DECORATIVE PATTERNS

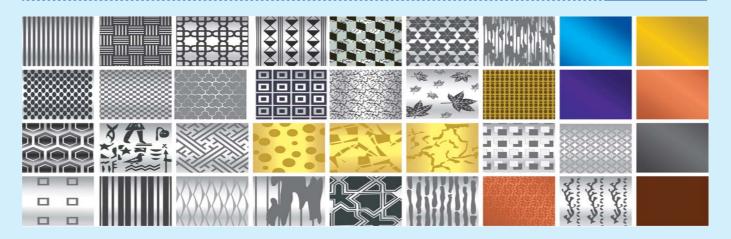

TYPES OF HANDLES

DISPLAYS COP'S & LOP'S





TECHNICAL SPECIFICATIONS



Passenger Lifts - Premium

Load		Lift Shaft		Carln	CarInside		Machine room		Pit	Overhead
Person	Kgs	width	depth	width	depth	opening	width	depth		
4	272	1600	1300	1100	700	700	3200	3500	1500	4250
5	340	1600	1400	1100	850	700	3200	3500	1500	4250
		1700	1300	1200	750	700	3200	3500	1500	4250
6	6 408	1600	1600	1100	1000	700	3200	3500	1500	4250
		1700	1500	1200	925	700	3200	3500	1500	4250
8	544	1800	1700	1300	1100	800	3500	4000	1500	4250
		1900	1600	1400	1000	800	3500	4000	1500	4250
10	680	1900	1900	1350	1300	800	4000	4000	1500	4250
		1800	2000	1300	1350	800	4000	4000	1500	4250
13	884	2000	2000	1500	1450	900	4000	4000	1500	4250
		2400	1800	1900	1150	900	4000	4000	1500	4250
16	1088	2500	2200	2000	1500	1000	4000	4000	1500	4250

Passenger Lifts - Home Lifts

Load		Lift Shaft		Car Inside		Clear	Machine room		Pit	Overhead
Person	Kgs	width	depth	width	depth	opening	width	depth		
4	272	1500	1200	1000	750	700	3000	3200	1500	4200
5	5 340	1500	1400	1000	925	700	3000	3200	1500	4200
		1600	1300	1100	850	700	3000	3200	1500	4200
6	408	1700	1400	1200	925	700	3000	3200	1500	4200
		1600	1500	1100	1000	700	3000	3200	1500	4200
8	544	1800	1600	1300	1100	800	3000	3500	1500	4200
		1900	1500	1400	1000	800	3000	3500	1500	4200

Passenger Lifts - Commercial Lifts

Load		LiftS	Shaft	Carlr	nside	Clear	Pit	Overhead
Person	Kgs	width	depth	width	depth	opening		
3	204	1400	1375	800	1000	800	550	2700
		1400	1375	850	1000	800	550	2700
4	4 272	1400	1575	800	1200	800	550	2700
		1400	1625	800	1250	800	550	2700
5	340	1450	1575	900	1200	800	550	2700
		1450	1625	900	1250	800	550	2700
6	408	1500	1500	1000	1100	800	550	2700
		1600	1675	1100	1200	800	550	2700

Passenger Lifts - Stretcher Lifts

Load		Lift Shaft		Car Inside		Clear	Machine room		Pit	Overhead
Person	Kgs	width	depth	width	depth	opening	width	depth		
15	1020	1800	3000	1000	2400	800	3300	4500	1500	4250
20	1360	2200	3000	1300	2400	1200	4000	4500	1500	4250
26	1768	2400	3000	1600	2400	1200	4200	4500	1500	4250

TECHNICAL SPECIFICATIONS

Hydro Lifts

Load		Lift Shaft		CarInside		Clear	Machine room		Pit	Overhead
Person	Kgs	width	depth	width	depth	opening	width	depth		
4	4 272	1400	1450	800	950	700	2000	2500	1350	3450
		1700	1200	1100	700	700	2000	2500	1350	3450
5	5 340	1600	1450	950	1000	700	2000	2500	1350	3450
		1700	1350	1100	850	700	2000	2500	1350	3450
6	408	1600	1600	950	1150	700	2000	2500	1350	3450
		1800	1400	1200	925	700	2000	2500	1350	3450
8	544	1700	1800	1000	1400	800	2500	2500	1350	3450
<u> </u>		1850	1800	1100	1300	800	2500	2500	1350	3450

MRL Lifts

Load		Lifts	Shaft	Carln	nside	Clear	Pit	Overhead
Person	Kgs	width	depth	width	depth	opening		
5	340	1700	1700	750	1250	700	1600	4250
		2000	1500	1000	900	700	1600	4250
6	408	1800	1750	800	1300	700	1600	4250
		2000	1650	1000	1100	700	1600	4250
8	544	2000	1850	1000	1400	800	1600	4250
		2300	1650	1300	1100	800	1600	4250
10	680	2300	1800	1300	1350	800	1600	4250
		2100	2100	1100	1600	800	1600	4250

Goods Lifts

Load	Lift Shaft		CarInside		Clear	Machine room		Pit	Overhead
Kgs	width	depth	width	depth	opening	width	depth		
500	1900	1500	1100	1200	1100	3500	4000	1500	4250
1000	2300	2100	1400	1800	1400	4000	4000	1500	4250
1500	2600	2300	1700	2000	1700	4000	4500	1500	4250
2000	2600	2800	1700	2500	1700	4000	5000	1500	4250
2500	2900	2800	2000	2500	2000	4300	5300	1500	4250
3000	2900	33000	2000	3000	2000	4300	5800	1500	4250
4000	3400	3300	2500	3000	2500	5000	5500	1600	4500
5000	3400	3900	2500	3600	2500	5000	6000	1600	4500

Automobile Lifts

Hydraulic Automobile

Load	Lift Shaft		Car Inside		Clear	Machine room		Pit	Overhead	
Kgs	width	depth	width	depth	opening	width	depth			
2500	3600	6400	2500	5700	2500 x 2100	2500	3000	1500	3600	
3000	4000	6700	2800	6000	2500 x 2100	3000	3000	1500	3600	
Traction Automobile										
2500	3750	6400	2500	5700	2500 x 2100	4750	6500	1500	4250	
3000	4000	6700	2800	6000	2500 x 2100	5000	7000	1500	4250	

Dumbwaiter Lifts

Load	Lift S	haft		Car Inside	Clear	Speed	
Kgs	width	depth	width	depth	height	opening	(M.P.S)
100	1200	900	700	700	800	700	0.3
150	1300	1000	800	800	900	800	0.3
200	1400	1100	900	900	1000	900	0.3
250	1500	1200	1000	1000	1200	1000	0.3



